



Features:

- Robust weather proof surface or suspension mounted LED luminaire.
- Impact resistant UV stabilised PC diffuser and body to withstand harsh environments.
- Highly efficient state of the art LED board, 130-140 LM/W.
- Glare free soft light output creates comfortable atmosphere.
- Wide beam light distribution. Diffuser with optical element to ensure visual comfort.
- Ceiling mounted bracket and suspension hooks included.
- Loop in-out facility for continuous installations.
- IP66 PG13.5 cable gland.
- Lumen maintenance up to 50,000hrs (L70B50 @35°C).

ITEMCODE	WATTAGE	COLOR TEMP	FINISH	LED LUMEN
335115	15W	4000K	636 X 102 X 81	2100LM
335134	34W	4000K	1176 X 102 X 81	4800LM

* Specify other colour temp with item code.



Applications

Warehouse, gymnasiums, manufacturing, car parks, sub-stations, outdoor canopies, cold storage.

Options

- **Dimming:** DALI, DSI and 1-10V dimming
- **With tuneable technology, the colour temperature can be adjusted**
- **Body:** GRP
- **Built-in presence sensor**
- **Color Temperatures :** 3000K, 4000K, 5000K
- **Optional vandal proof mounting brackets**
- **Emergency 3hrs back ups**



Features:

- Robust weather proof surface or suspension mounted LED luminaire.
- Impact resistant UV stabilised PC diffuser and body to withstand harsh environments.
- Highly efficient state of the art LED board, 130-140 LM/W.
- Glare free soft light output creates comfortable atmosphere.
- Wide beam light distribution. Diffuser with optical element to ensure visual comfort.
- Ceiling mounted bracket and suspension hooks included.
- Loop in-out facility for continuous installations.
- IP66 PG13.5 cable gland.
- Lumen maintenance up to 50,000hrs (L70B50 @35°C).

ITEMCODE	WATTAGE	COLOR TEMP	FIN. FINISH	LED LUMEN
335142	42W	4000K	1506 X 102 X 81	6000LM
335155	55W	4000K	1506 X 102 X 81	8000LM

* Specify other colour temp with item code.



Applications


Warehouse, gymnasiums, manufacturing, car parks, sub-stations, outdoor canopies, cold storage.

Options

- **Dimming:** DALI, DSI and 1-10V dimming
- **With tuneable technology, the colour temperature can be adjusted**
- **Body:** GRP
- **Built-in presence sensor**
- **Color Temperatures :** 3000K, 4000K, 5000K
- **Optional vandal proof mounting brackets**
- **Emergency 3hrs back ups**



120°

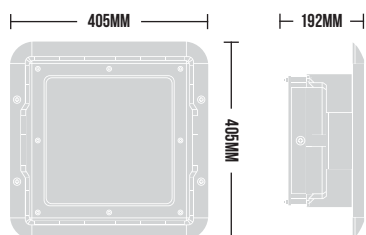

Features:

- High luminous efficacy and source Flush mount canopy fixture. Multiple mounting options recessed and surface.
- Optional built in motion sensor.
- Die cast aluminium body with heat sink fins and air circulation for better heat management.
- Covers large areas with no dark patches.
- Latest SMD technology to have uniform light output.
- Controlled optic lenses for wider applications. Supplied in white finish body, other colours available on request.
- Special various suspension options available. Tempered glass diffuser. Integral driver in IP66 aluminium gear box.
- 160lm/W Highest lumen per watt-up to 32000 lumens. Suitable for ambient temperatures of -25°C~+50°C.
- Solid state LED lighting technology. Colour rendering index Ra70, Ra80.
- Built in surge protection device.
- Lumen maintenance up to 50,000hrs (L90 B10 @35°).

ITEMCODE	WATTAGE	COLOR TEMP	LM/W	LED LUMEN
557050	50W	5000K	405 X 405	8000LM
557080	80W	5000K	405 X 405	12800LM
557100	100W	5000K	405 X 405	16000LM


* Specify for other colour temperatures.

Applications

Factories, halls, educational facilities, work stations, warehouses, showrooms, atriums, high-level ceilings.

Options

- CRI 85+
- Color Temperatures : 3000K, 4000K and 5000K.



Recessed Mounted




Surface Mounted



Suspension Mounted



120°

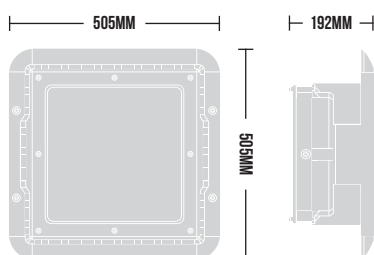

Features:

- High luminous efficacy and source Flush mount canopy fixture. Multiple mounting options recessed and surface.
- Optional built in motion sensor.
- Die cast aluminium body with heat sink fins and air circulation for better heat management.
- Covers large areas with no dark patches.
- Latest SMD technology to have uniform light output.
- Controlled optic lenses for wider applications. Supplied in white finish body, other colours available on request.
- Special various suspension options available. Tempered glass diffuser. Integral driver in IP66 aluminium gear box.
- 160lm/W Highest lumen per watt-up to 32000 lumens. Suitable for ambient temperatures of -25°C~+50°C.
- Solid state LED lighting technology. Colour rendering index Ra70, Ra80.
- Built in surge protection device.
- Lumen maintenance up to 50,000hrs (L90 B10 @35°).

ITEMCODE	WATTAGE	COLOR TEMP	ARM (MM)	LED LUMEN
557120	120W	5000K	505 X 505	19200LM
557150	150W	5000K	505 X 505	24000LM
557200	200W	5000K	505 X 505	32000LM

* Specify for other colour temperatures.


Applications

Factories, halls, educational facilities, work stations, warehouses, showrooms, atriums, high-level ceilings.

Options

-- CRI 85+

- Color Temperatures : 3000K, 4000K and 5000K.




Recessed Mounted



Surface Mounted



Suspension Mounted

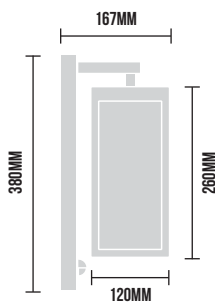

Features:

- Outdoor wall light, heavy duty cast aluminium body with tempered glass diffuser.
- No dark or hot spot.
- Edgelit technology to have smooth uniform effect.
- IP65 rated with silicone sealed, bugs-free.
- Die cast aluminium base fins to act as heat sink and provide more rigid fixing on the soffits.
- Cost effective, easy to maintain.
- Lumen maintenance up to 50,000hrs (L90 B10 @35°).

ITEMCODE	WATTAGE	COLOR TEMP	SIZE	LUMEN
661410	10W	4000K	120X167X380	600LM

* Specify for other colour temperatures.





Applications

Outdoor walls, boundary wall, entrances ,villas, recreational outdoor facilities.

Options

- CRI 90+
- Color Temperatures : 3000K, 4000K and 5000K
- Microwave sensor

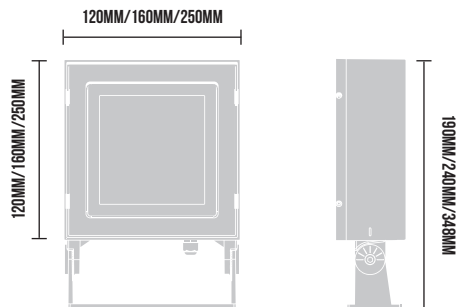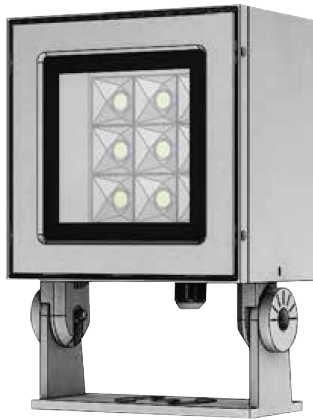

Features:

- Elegant symmetrical square LED flood light.
- Multiple options for distribution allows using this fixture in various applications.
- Latest generation of LED's from Osram or Nichia.
- Tempered toughened glass 3mm.
- Wide range of optics from narrow 9° to wide 60°.
- Integral driver as standard, remote 24V DC as an option.
- Choice of grey or black body finish.
- Optional specially designed cowl for controlling light spill. Cable gland: IP-68 PG-9 PVC.
- Lumen maintenance up to 50,000hrs (L90 B10 @35°).

ITEMCODE	WATTAGE	COLOR TEMP	Beam Angle	LED LUMEN
651414	14W	3000K	120 X 190	1200LM
651927	27W	3000K	160 X 240	2650LM
651275	75W	3000K	250 X 348	7500LM

* Specify for other colour temperatures.




Applications

Exterior garden and landscape area, trees, plants, building facades, monuments, open spaces and pathway lighting.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming
- **CRI 90+**
- **Color Temperatures :** 2700K, 3000K and 6500K
- **Complete DMX system package for color changing applications.**
- **Various beam angles**
- **Snoot accessory**

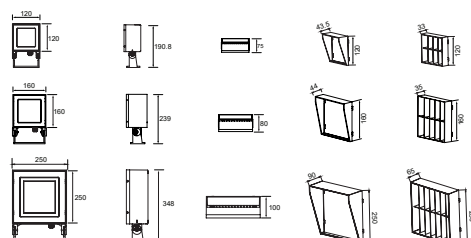



Features:

- Robust outdoor amenity LED fixture.
- Architecturally designed with square head frame and body.
- DuoPont outdoor electrostatic powder coating paint with high corrosion resistances.
- Diffuser is high impact PMMA.
- Stainless steel fasteners and fixing screws.
- High purity extruded aluminium body.
- Zero upward lighting avoiding light pollution.
- Easy to install with flange base.
- Fixture supplied with flange base as standard, anchor bolts kit optional.
- Lumen maintenance up to 50,000hrs (L90 B10 @35°).



ITEMCODE	WATTAGE	COLOR TEMP	FLANGE (MM)	LED LUMEN
566420	20W	4000K	100 X 150 X 800	1300LM
567420	2 X 20W	4000K	100 X 150 X 800	2 X 1300LM

* Specify for other colour temperatures.
* Also available in 1100 height.







Applications

Gardens, pathways, walkways, landscapes, approach light, entrances, amenity and car park lighting.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming
- **CRI 90+**
- **Color Temperatures :** 3000K, 4000K and 5000K
- **Matt black and matt silver grey colour finish**
- **J bolts kits optional**

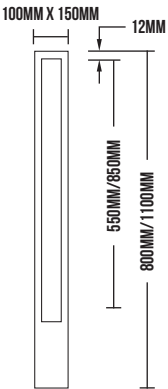

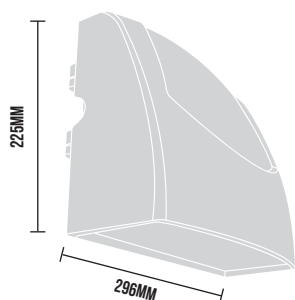

Features:

- Surface mounted LED asymmetric wall light.
- Die cast aluminium body with outdoor polyester and anti-corrosion material coating.
- Slim yet robust design makes it ideal for harsh exterior applications.
- Uniformly asymmetrical light distribution, illuminating the area without light pollution.
- Robust IK08 rated for interior and exterior applications.
- Supplied in bronze color as standard.
- Integral Driver.
- Lumen maintenance up to 50,000hrs (L90 B10 @35°).

ITEMCODE	WATTAGE	COLOR TEMP	FINISH	LED LUMEN
963140	40W	4000K	296X225	5600LM
963170	70W	4000K	296X225	9800LM

* Specify for other colour temperatures.




Applications

Exterior garden and landscape area, building facades, monuments.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming
- **CRI 90+**
- **Color Temperatures :** 3000K, 4000K and 5000K

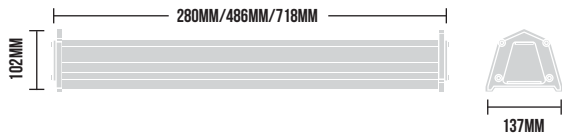

Features:

- Linear pendant or surface mounted high efficiency industrial LED luminaire.
- Aluminium alloy housing with heat sink fins and air circulation holes for better heat management.
- Covers large areas with no dark patches. Deliver a controlled beam ideal for areas between pallet racking and along side aisles.
- Anti-glare polycarbonate lens. More efficient than standard round wide beam highbays.
- Supplied in matt black finish body, other colours available on request.
- Rigid lock hook suspension.
- Integral driver in IP65 aluminium gear box.
- Suitable for ambient temperatures of -25°C~+50°C.
- Lumen maintenance up to 50,000hrs (L90 B10 @35°).

ITEMCODE	WATTAGE	COLOR TEMP	DIM. (MM)	LED LUMEN
575130	30W	5000K	280 X 137	4950LM
575160	60W	5000K	486 X 137	9900LM
575190	90W	5000K	718 X 137	14850LM

* Specify for other colour temperatures.





Applications

Factories, halls, educational facilities, work stations, warehouses, showrooms, atriums, high-level ceilings.

Options

- **Dimming:** 1~10V Dimmable/DALI Dimm/ZigBee Control
- **Color Temperatures :** 3000K, 4000K and 5000K
- **Intelligent Control:** Microwave Sensor/PIR sensor
- **Mounting:** Surface/Ceiling/Adjustable brackets

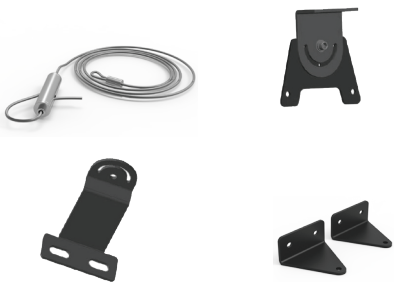

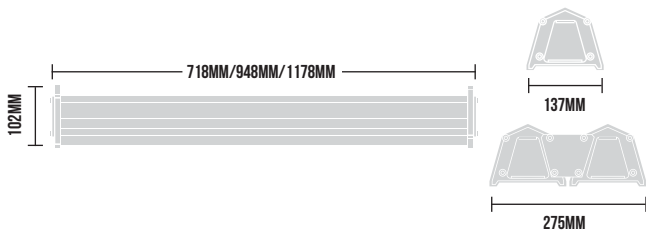

Features:

- Linear pendant or surface mounted high efficiency industrial LED luminaire.
- Aluminium alloy housing with heat sink fins and air circulation holes for better heat management.
- Covers large areas with no dark patches. Deliver a controlled beam ideal for areas between pallet racking and along side isles.
- Anti-glare polycarbonate lens. More efficient than standard round wide beam highbays.
- Supplied in matt black finish body, other colours available on request.
- Rigid lock hook suspension.
- Integral driver in IP65 aluminium gear box.
- Suitable for ambient temperatures of -25°C~+50°C.
- Lumen maintenance up to 50,000hrs (L90 B10 @35°).

ITEMCODE	WATTAGE	COLOR TEMP	DIM. (MM)	LED LUMEN
575120	120W	5000K	948 X 137	19800LM
575150	150W	5000K	1178 X 137	24750LM
575180	180W	5000K	718 X 275	29700LM

* Specify for other colour temperatures.



Applications

Factories, halls, educational facilities, work stations, warehouses, showrooms, atriums, high-level ceilings.

Options

- **Dimming:** 1~10V Dimmable/DALI Dimm/ZigBee Control
- **Color Temperatures :** 3000K, 4000K and 5000K
- **Intelligent Control:** Microwave Sensor/PIR sensor
- **Mounting:** Surface/Ceiling/Adjustable brackets

